

BS EN 62562:2011



BSI Standards Publication

# Cavity resonator method to measure the complex permittivity of low-loss dielectric plates

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

raising standards worldwide™



## National foreword

This British Standard is the UK implementation of EN 62562:2011. It is identical to IEC 62562:2010. It supersedes DD IEC/PAS 62562:2008 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee EPL/46, Cables, wires and waveguides, radio frequency connectors and accessories for communication and signalling.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© BSI 2011

ISBN 978 0 580 61106 3

ICS 172202033.12001

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 March 2011.

## Amendments issued since publication

Amd. No.	Date	Text affected
----------	------	---------------

---

EUROPEAN STANDARD  
NORME EUROPÉENNE  
EUROPÄISCHE NORM

**EN 62562**

February 2011

ICS 17.220

English version

**Cavity resonator method to measure the complex permittivity  
of low-loss dielectric plates**  
(IEC 62562:2010)

Méthode de la cavité résonante pour  
mesurer la permittivité complexe des  
plaques diélectriques à faibles pertes  
(CEI 62562:2010)

Hohlraumresonanzverfahren zum Messen  
der komplexen Permittivität von  
verlustarmen dielektrischen Platten  
(IEC 62562:2010)

This European Standard was approved by CENELEC on 2011-01-02. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

**CENELEC**

European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**Management Centre: Avenue Marnix 17, B - 1000 Brussels**

## Foreword

The text of document 46F/118/CDV, future edition 1 of IEC 62562, prepared by SC 46F, R.F. and microwave passive components, of IEC TC 46, Cables, wires, waveguides, R.F. connectors, R.F. and microwave passive components and accessories, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 62562 on 2011-01-02.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN and CENELEC shall not be held responsible for identifying any or all such patent rights.

The following dates were fixed:

- latest date by which the EN has to be implemented  
at national level by publication of an identical  
national standard or by endorsement (dop) 2011-10-02
- latest date by which the national standards conflicting  
with the EN have to be withdrawn (dow) 2014-01-02

## Endorsement notice

The text of the International Standard IEC 62562:2010 was approved by CENELEC as a European Standard without any modification.

---

## CONTENTS

1	Scope.....	5
2	Measurement parameters .....	5
3	Theory and calculation equations .....	6
3.1	Relative permittivity and loss tangent .....	6
3.2	Temperature dependence of $\epsilon'$ and $\tan\delta$ .....	9
3.3	Cavity parameters .....	10
4	Measurement equipment and apparatus .....	11
4.1	Measurement equipment .....	11
4.2	Measurement apparatus for complex permittivity .....	11
5	Measurement procedure.....	12
5.1	Preparation of measurement apparatus .....	12
5.2	Measurement of reference level .....	12
5.3	Measurement of cavity parameters: $D$ , $H$ , $\sigma_r$ , $\alpha_c$ , $TCp$ .....	12
5.4	Measurement of complex permittivity of test specimen: $\epsilon'$ , $\tan\delta$ .....	14
5.5	Temperature dependence of $\epsilon'$ and $\tan\delta$ .....	15
	Annex A (informative) Example of measured result and accuracy .....	16
	Bibliography.....	20
	Figure 1 – Resonator structures of two types .....	6
	Figure 2 – Correction term $\Delta\epsilon'/\epsilon'a$ .....	9
	Figure 3 – Correction terms $\Delta A/A$ and $\Delta B/B$ .....	9
	Figure 4 – Schematic diagram of measurement equipments.....	11
	Figure 5 – Cavity resonator used for measurement .....	12
	Figure 6 – Photograph of cavity resonator for measurement around 10 GHz .....	12
	Figure 7 – Mode chart of cavity resonator .....	13
	Figure 8 – Resonance peaks of cavity resonator.....	13
	Figure 9 – Resonance frequency $f_0$ , insertion attenuation $IA_0$ and half-power band width $f_{BW}$ .....	14
	Figure 10 – Resonance frequency $f_0$ of TE <sub>011</sub> mode of cavity resonator with dielectric plate ( $D = 35$ mm, $H = 25$ mm) .....	15
	Figure A.1 – Measured temperature dependence of $f_1$ and $Q_{uc}$ .....	17
	Figure A.2 – Resonance peaks of cavity resonator clamping sapphire plate.....	18
	Figure A.3 – Measured results of temperature dependence of $f_0$ , $Q_u$ , $\epsilon'$ and $\tan\delta$ for sapphire plate.....	19
	Table A.1 – Measured results of cavity parameters.....	16
	Table A.2 – Measured results of $\epsilon'$ and $\tan\delta$ for sapphire plate .....	18

## CAVITY RESONATOR METHOD TO MEASURE THE COMPLEX PERMITTIVITY OF LOW-LOSS DIELECTRIC PLATES

### 1 Scope

The object of this International Standard is to describe a measurement method of dielectric properties in the planar direction of dielectric plate at microwave frequency. This method is called a cavity resonator method. It has been created in order to develop new materials and to design microwave active and passive devices for which standardization of measurement methods of material properties is more and more important.

This method has the following characteristics:

- the relative permittivity  $\epsilon'$  and loss tangent  $\tan\delta$  values of a dielectric plate sample can be measured accurately and non-destructively;
- temperature dependence of complex permittivity can be measured;
- the measurement accuracy is within 0,3 % for  $\epsilon'$  and within  $5 \times 10^{-6}$  for  $\tan\delta$  ;
- fringing effect is corrected using correction charts calculated on the basis of rigorous analysis.

This method is applicable for the measurements on the following condition:

- frequency :  $2 \text{ GHz} < f < 40 \text{ GHz}$ ;
- relative permittivity:  $2 < \epsilon' < 100$ ;
- loss tangent :  $10^{-6} < \tan\delta < 10^{-2}$ .

### 2 Measurement parameters

The measurement parameters are defined as follows:

$$\epsilon_r = \epsilon' - j\epsilon'' = D/(\epsilon_0 E) \quad (1)$$

$$\tan\delta = \epsilon''/\epsilon' \quad (2)$$

$$TC\epsilon = \frac{1}{\epsilon} \frac{\epsilon - \epsilon_{ref}}{T - T_{ref}} \times 10^6 \quad (1 \times 10^{-6}/K) \quad (3)$$

where

$D$  is the electric flux density;

$E$  is the electric field strength;

$\epsilon_0$  is the permittivity in a vacuum;

$\epsilon'$  and  $\epsilon''$  are the real and imaginary components of the complex relative permittivity  $\epsilon_r$ ;

$TC\epsilon$  is the temperature coefficient of relative permittivity;

$\epsilon$  and  $\epsilon_{ref}$  are the real parts of the complex relative permittivity at temperature  $T$  and

T

reference temperature  $T_{\text{ref}}$  (= 20 °C to 25 °C), respectively.

### 3 Theory and calculation equations

#### 3.1 Relative permittivity and loss tangent

A resonator structure used in the nondestructive measurement of the complex permittivity is shown in Figure 1a.

A cavity having diameter  $D$  and length  $H = 2M$  is cut into two halves in the middle of its length.

A dielectric plate sample having  $\epsilon'$ ,  $\tan\delta$  and thickness  $t$  is placed between these two halves.

The  $TE_{011}$  mode, having only the electric field component tangential to the plane of the sample, is used for the measurement, since air gaps at the plate-cavity interfaces do not affect the electromagnetic field. Taking account of the fringing field in the plate region outside diameter of the cavity on the basis of the rigorous mode matching analysis, we determine  $\epsilon'$  and  $\tan\delta$  from the measured values of the resonant frequency  $f_0$  and the unloaded  $Q$ -factor  $Q_u$ . This numerical calculation, however, is rather tedious.

Therefore,

- approximated values  $\epsilon'_a$  and  $\tan\delta_a$  from the  $f_0$  and  $Q_u$  values by using simple formula for a resonator structure shown in Figure 1b, where a fringing effect for Figure 1a is neglected, will be determined;
- then, accurate values  $\epsilon'$  and  $\tan\delta$  from  $\epsilon'_a$  and  $\tan\delta_a$  using charts calculated from the rigorous analysis will be obtained.

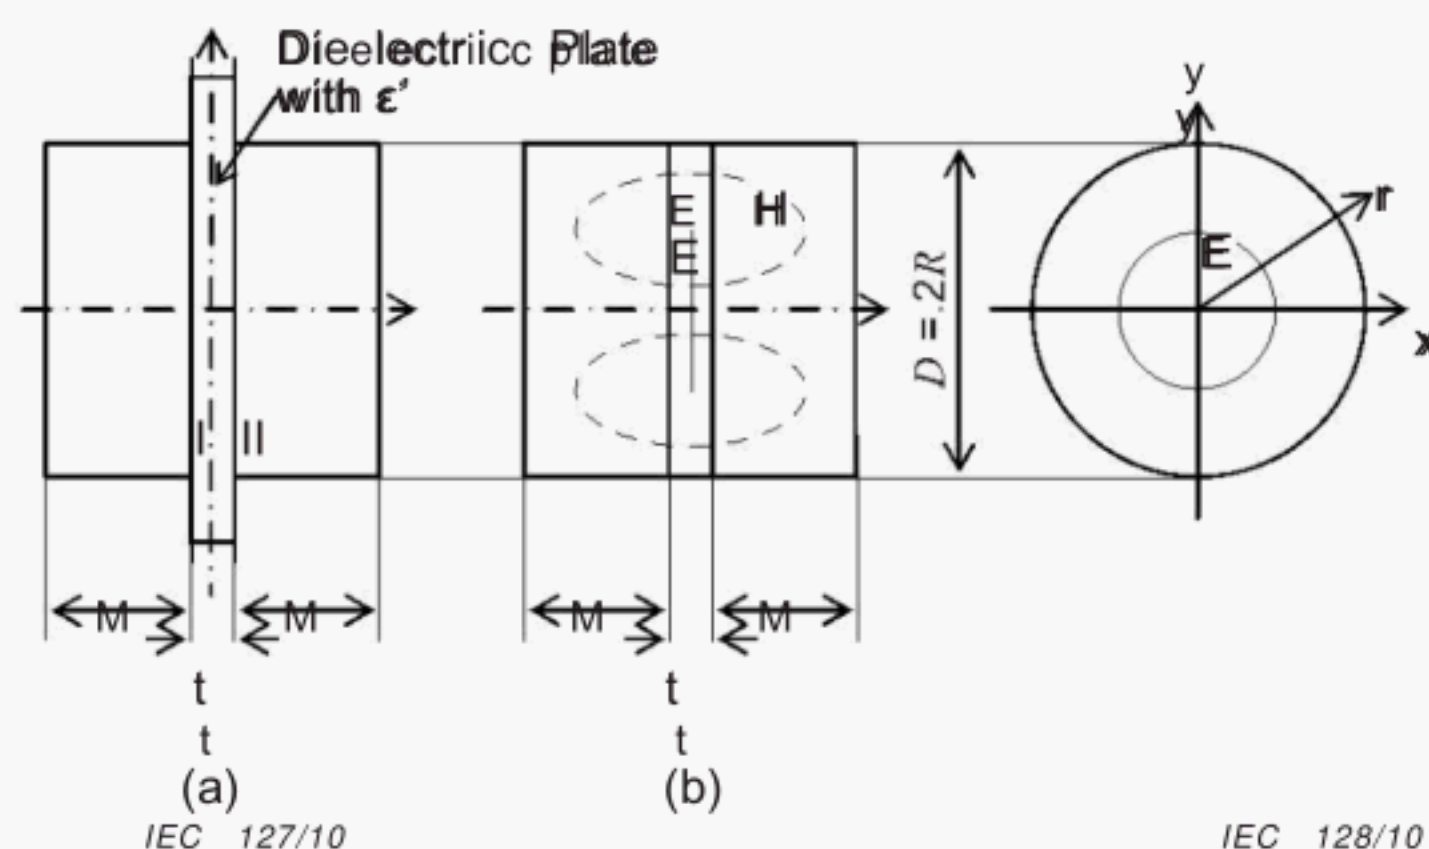


Figure 1a – Resonator used in measurement      Figure 1b – Resonator to calculate  $\epsilon'_a$  and  $\tan\delta_a$

Figure 1 – Resonator structures of two types

The value of  $\epsilon'_a$  is given by

$$\epsilon'_a = \frac{\left( \frac{2}{\left( \frac{1}{\epsilon'_a} + \frac{1}{\epsilon'_a} \right)} \right)^2}{\left( \frac{1}{\epsilon'_a} + \frac{1}{\epsilon'_a} \right)^2} + 1 \quad (4)$$

$$\left( \frac{\pi t f}{0} \right) \left( \frac{2M}{1} \right)$$

where  $c$  is the velocity of light in a vacuum ( $c = 2,997\,9 \times 10^8 \text{ m/s}$ ) and the first root  $X$  is calculated from a given value  $Y$ , using the following simultaneous equations:

$$X \tan X = \frac{t}{2M} Y \cot Y \quad (5)$$

$$Y = \frac{\sqrt{k_0^2 - k_r^2}}{M} = jY' \quad (6)$$

with  $k_0 = 2\pi f_0 \epsilon_0 \epsilon_a$ ,  $k_r = j'_{01} R$ , and  $j'_{01} = 3,83173$  for the  $TE_{011}$  mode. When  $k_0 - k_r < 0$ ,  $Y$  is replaced by  $jY'$ .

The value of  $\tan \delta_a$  is given by

$$\tan \delta_a = \frac{A}{Q_u} - R_s B \quad (7)$$

where  $R_s$  is the surface resistance of the conductor of cavity, given by

$$R_s = \frac{\pi f_0 \mu}{\sigma} \quad \left( \frac{1}{S} \right), \quad \sigma = \sigma_0 \sigma_r \quad (S/m) \quad (8)$$

Here,  $\mu$  and  $\sigma$  are the permeability and conductivity of the conductor. Furthermore,  $\sigma_r$  is the relative conductivity and  $\sigma_0 = 5,8 \times 10^7$  S/m is the conductivity of standard copper. Constants  $A$  and  $B$  are given by

$$A = 1 + \frac{W_2^e}{W_1^e} \quad (9)$$

$$B = \frac{P_{cy1} + P_{cy2} + P_{end}}{\omega R_s W_1^e} \quad (10)$$

In the above,  $W_1^e$  and  $W_2^e$  are electric field energies stored in the dielectric plate of region 1 and air of region 2 shown in Figure 1a. Furthermore,  $P_{cy1}$ ,  $P_{cy2}$  and  $P_{end}$  are the conductor loss at the cylindrical wall in the region 1, 2 and at the end wall. These parameters are given by

$$W_1^e = \frac{\pi}{8} \epsilon_0 \epsilon_a \mu_0 \omega^2 \left( \frac{J_0^2(j'_{01})}{1 + \frac{\sin^2 2X}{2X}} \right) \quad (11)$$

$$W^e = \frac{\pi}{\epsilon \mu \omega} \frac{j_z J_z}{2 \cdot 2 \cdot 2} \frac{(j')}{2} M \left| 1 - \left( \frac{\sin 2Y}{\cos X} \right)^2 \right| \quad (12)$$

$$\frac{2}{4} \frac{0}{0} \frac{01}{0} \frac{01}{0} \left( \frac{\sin 2Y}{2Y} \right)^2 Y$$

$$P_{cy} = \frac{\pi}{2} \frac{J_z}{4} \frac{(j')}{tRk_r} \left| 1 + \left( \frac{\sin 2X}{2X} \right)^2 \right| \quad (13)$$

$$P_{cy2} = \frac{\pi}{2} \frac{R}{J_z} \frac{(j')}{s_0} M R k_r \left( \frac{\sin 2Y}{\cos X} \right)^2 \left| 1 - \frac{4}{r} \left( \frac{2Y}{2Y} \right) \sin \frac{Y}{2} \right| \quad (14)$$

$$P_{\text{end}} = \frac{\pi}{2} \frac{R_j^2 J_0^2(j'_{01})}{s_{01}^2} \left( \frac{Y}{\cos X} \right)^2 \frac{1}{\sin^2 Y} \left( \frac{M}{01} \right) \quad (15)$$

Then, accurate values of  $\epsilon'$  and  $\tan\delta$  are given by

$$\epsilon' = \epsilon' \left( 1 - \frac{\Delta \epsilon'}{\epsilon'} \right) \quad (16)$$

$$\tan \delta = \frac{A \left( \frac{\Delta A}{A} \right) + \frac{sB}{Q} \left( \frac{\Delta B}{B} \right)}{1 + \frac{A}{Q} - R \left( 1 + \frac{B}{A} \right)} \quad (17)$$


where correction terms due to the fringing field  $\Delta\epsilon' \epsilon'_a$ ,  $\Delta A/A$  and  $\Delta B/B$  are calculated numerically on the basis of rigorous mode matching analysis using the Ritz-Galerkin method, as shown in Figures 2 and 3. It is found from the analysis for a circular dielectric plate with diameter  $d$  that  $f_0$  converges to a constant value for  $d/D > 1.2$ . The correction terms shown in Figures 2 and 3 were calculated for  $d/D > 1.5$ . Therefore, the correction terms are applicable to dielectric plates with any shape if  $d/D > 1.2$ .

Measurement uncertainties of  $\epsilon'$  and  $\tan\delta$ ,  $\Delta\epsilon'$  and  $\Delta\tan\delta$  are estimated as the mean square errors and given respectively by


$$(\Delta\epsilon')^2 = (\Delta\epsilon_f)^2 + (\Delta\epsilon_t)^2 + (\Delta\epsilon_D)^2 + (\Delta\epsilon_H)^2 \quad (18)$$

$$(\Delta\tan\delta)^2 = (\Delta\tan\delta_Q)^2 + (\Delta\tan\delta_\sigma)^2 \quad (19)$$

where  $\Delta\epsilon'_f$ ,  $\Delta\epsilon'_t$ ,  $\Delta\epsilon'_D$  and  $\Delta\epsilon'_H$  are the uncertainties of  $\epsilon'$  due to standard deviations of  $f_0$ ,  $t$ ,  $D$ , and  $H$ , respectively. Also,  $\Delta\tan\delta$  is mainly attributed to measurement errors of  $Q_u$  and  $\sigma_r$ , and  $\Delta\tan\delta_Q$  and  $\Delta\tan\delta_\sigma$  are uncertainties of  $\tan\delta$  due to standard deviations of them, respectively.

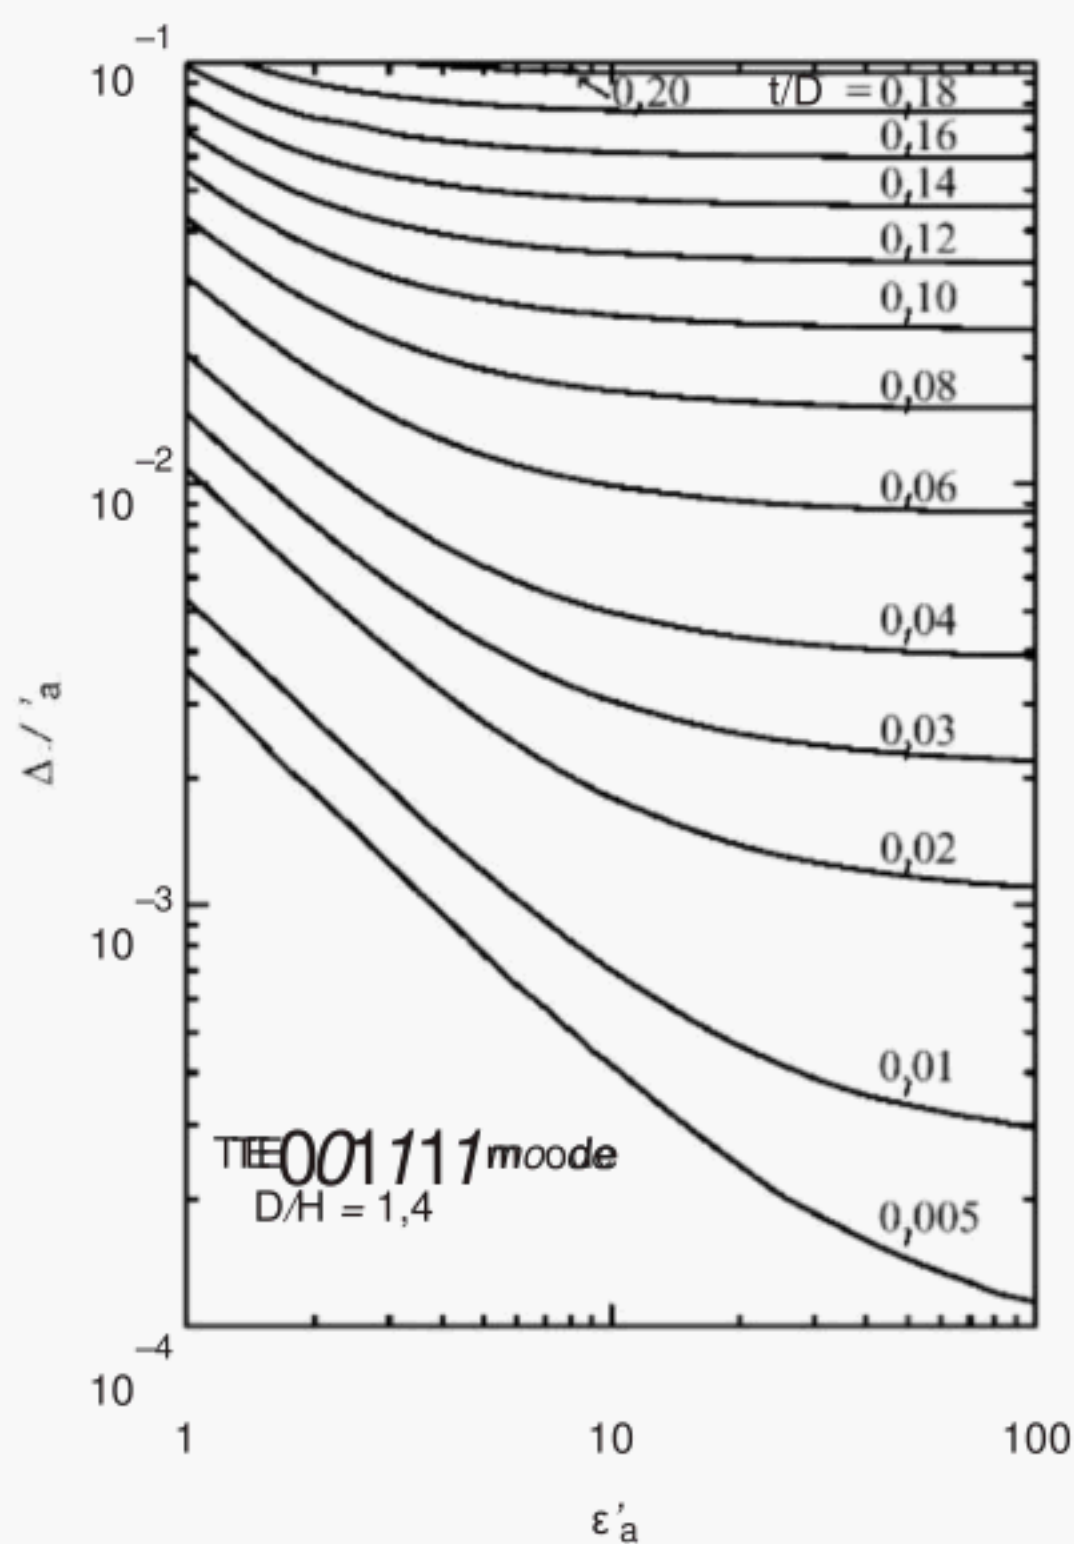

IEC 129/10

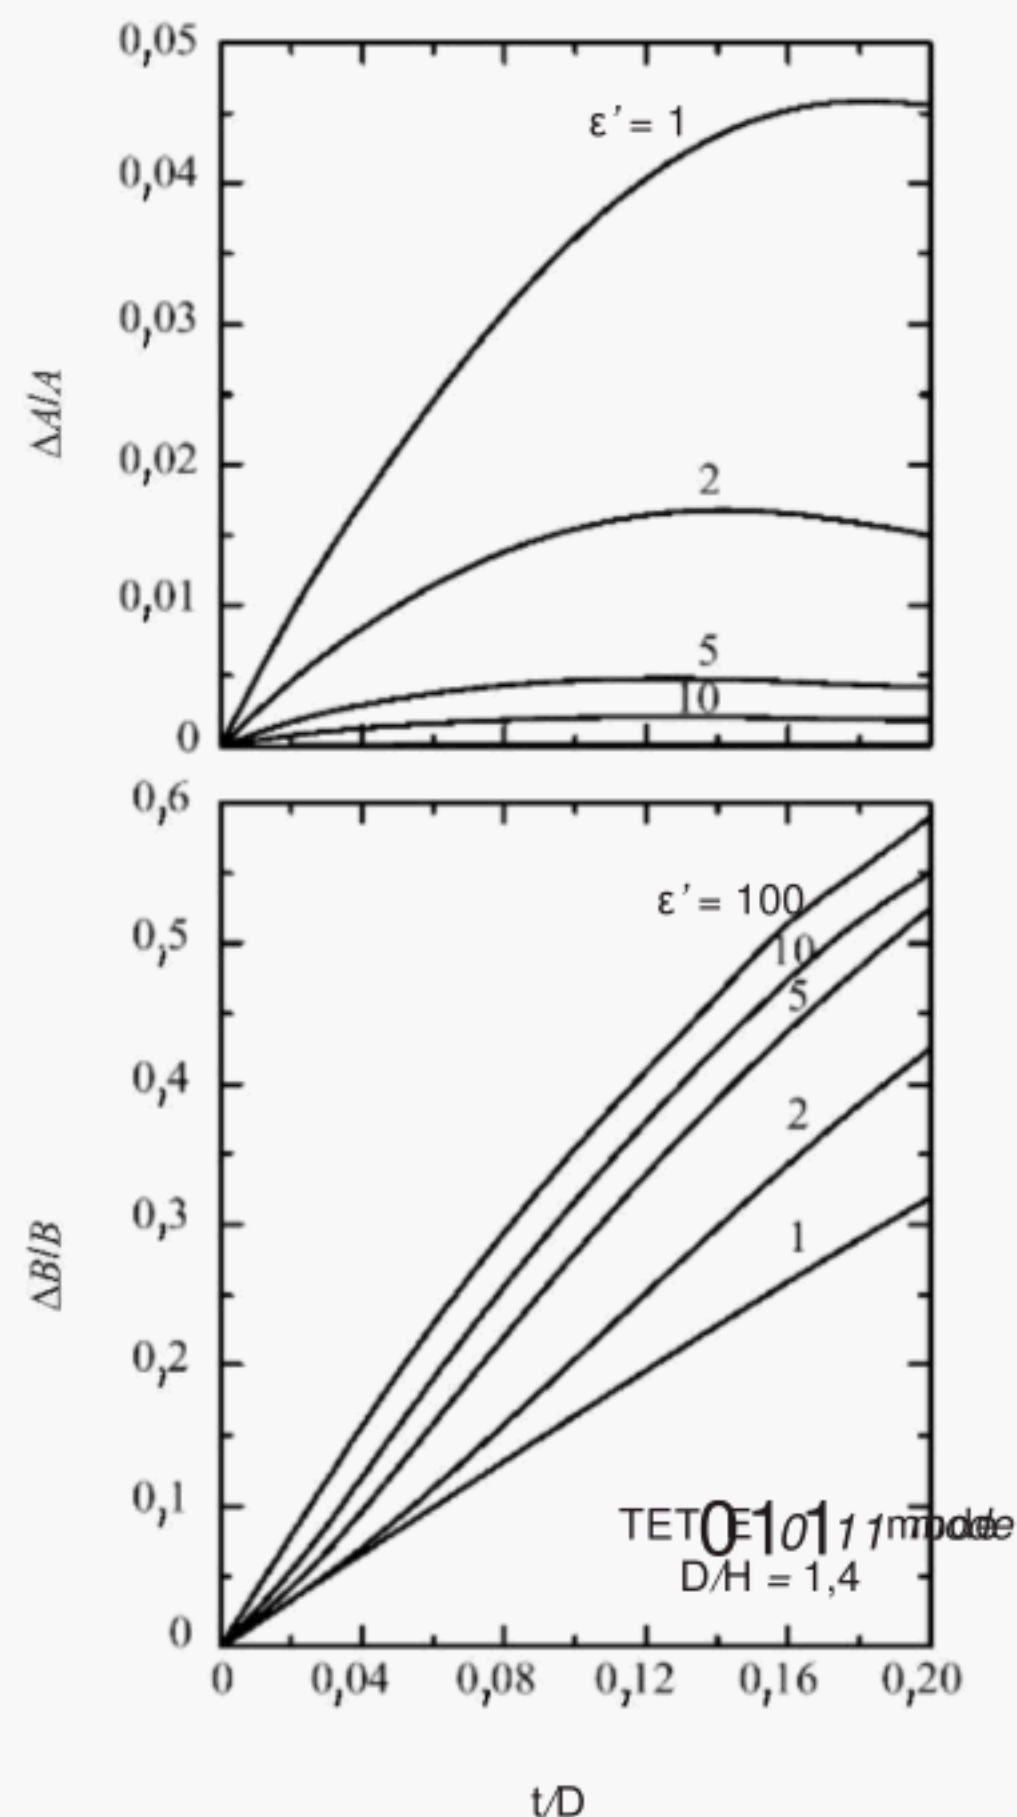Figure 2 – Correction term  $\Delta\epsilon'/\epsilon'_a$ 

IEC 130/10

Figure 3 – Correction terms  $\Delta A/A$  and  $\Delta B/B$ 

### 3.2 Temperature dependence of $\epsilon'$ and $\tan\delta$

Temperature dependence of  $\epsilon'$  and  $\tan\delta$  also can be measured using this method. Temperature coefficient of relative permittivity  $TC\epsilon$  is calculated by equation (3).

When the temperature dependences of  $\epsilon'$  is linear, particularly,  $\epsilon'(T)$  is given by

$$\epsilon'(T) = \epsilon'(T_0)[1 + TC\epsilon(T - T_0)] \quad (20)$$

where  $T$  and  $T_0$  are the temperatures in measurement and the reference temperature, respectively. In this case,  $TC\epsilon$  can be determined by the least squares method for many measurement points against  $T$ .

The thermal linear expansion coefficient of the dielectric plate  $\alpha$  and that of the conductor cavity  $\alpha_c$  should be considered in the  $TC\epsilon$  measurement. Furthermore, the temperature coefficient of resistivity  $TC\rho$  should be considered in the temperature dependence measurement of  $\tan\delta$ . Using these parameters, temperature dependent values of  $t(T)$ ,  $D(T)$ ,  $H(T)$ , and  $\rho(T)$  are given by

$$t = \frac{t(T_0) + \alpha_c (T - T_0)}{t(T_0)[1 + \alpha_c (T - T_0)]} \quad (21)$$

$$D = \frac{D(T_0) + \alpha_c (T - T_0)}{D(T_0)[1 + \alpha_c (T - T_0)]} \quad (22)$$

$$H = \frac{H(T_0) + \alpha_c (T - T_0)}{H(T_0)[1 + \alpha_c (T - T_0)]} \quad (23)$$

$$\rho(T) = \frac{1}{\sigma(T)} = \frac{\rho(T_0) + TC\rho(T - T_0)}{\sigma(T_0)[1 + \alpha_c(T - T_0)]} \quad (24)$$

### 3.3 Cavity parameters

Cavity parameters such as  $D$ ,  $H = \sqrt{2M}$ ,  $\alpha_c$ ,  $\sigma_r$  and  $TC\rho$  are determined from the measurements for the  $TE_{011}$  and  $TE_{012}$  resonance modes of an empty cavity without a sample, in advance of complex permittivity measurements. At first,  $D$  and  $H$  are determined from two measured resonant frequencies,  $f_1$  for the  $TE_{011}$  mode and  $f_2$  for the  $TE_{012}$  mode, by using

$$D = \frac{c^3}{\pi^4} \frac{f_1^2 - f_2^2}{f_1^3 - f_2^3} \quad (25)$$

$$H = \frac{c^3}{2} \frac{f_1^2 - f_2^2}{f_1^2 - f_2^2} \quad (26)$$

which can be derived easily from the resonance condition of the cavity.

Secondly,  $\alpha_c$  is determined from the measurement of temperature dependence of  $f_1$ , by using

$$\alpha_c = \frac{1}{f_1} \frac{\Delta f}{\Delta T} \quad (27)$$

Thirdly,  $\sigma_r$  is determined from the measured values  $D$ ,  $H$ ,  $f_1$ ,  $Q_{uc}$ , which is the unloaded  $Q$ -factor for the  $TE_{011}$  mode, by the following equation:

$$\left( \frac{D}{4\pi f_1 Q_{uc}} \right)^2 = \left( \frac{H}{2\pi} \right)^2 + \left( \frac{D}{2\pi} \right)^2$$

$$\sigma_r = \left( \frac{1}{2} \left( \frac{2H}{\pi D} \right)^2 + \frac{1}{2} \left( \frac{2H}{\pi D} \right)^2 + \frac{1}{2} \left( \frac{2H}{\pi D} \right)^2 \right) \quad (28)$$


Finally, TCp is determined from the measurement of temperature dependence of  $\rho_r = \sigma_0 / \sigma$  by using

$$TCp = \frac{1}{\rho_r} \frac{\Delta \rho}{\Delta T} \quad (29)$$

## 4 Measurement equipment and apparatus


### 4.1 Measurement equipment

Figure 4 shows a schematic diagram of two equipment systems required for millimetre wave measurement. For the measurement of dielectric properties, only the information on the amplitude of transmitted power is needed, that is, the information on the phase of the transmitted power is not required. Therefore, a scalar network analyzer can be used for the measurement shown in Figure 4a. However, a vector network analyzer, as shown in Figure 4b, has an advantage in precision of the measurement data.

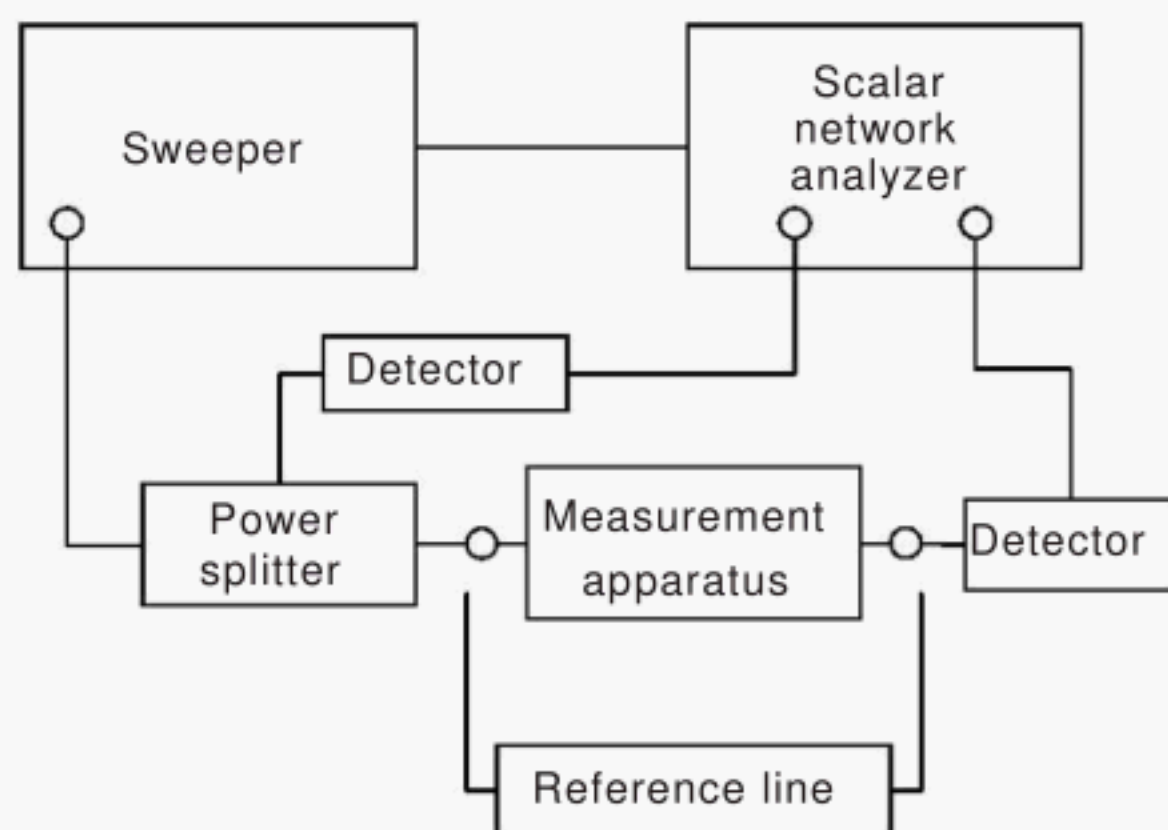

IEC 131/10

Figure 4a – Scalar network analyzer system

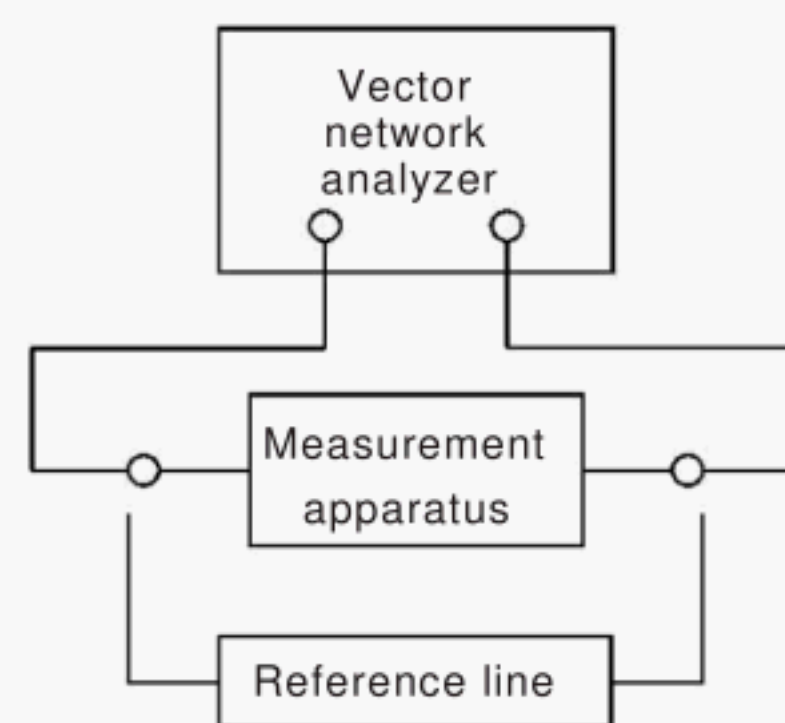

IEC 132/10

Figure 4b – Vector network analyzer system


Figure 4 – Schematic diagram of measurement equipments

### 4.2 Measurement apparatus for complex permittivity

The structure of the cavity resonator used in the complex permittivity measurement is shown in Figure 5. A cylindrical cavity containing two cup-shaped parts is machined from a copper block. The cavity resonator has  $D = 35$  mm,  $H = 25$  mm and a flange diameter  $D_f > 1,5$  mm for the measurement around 10 GHz. A specimen with diameter  $d > 1,2 \times D$  is placed between the two parts and clamped with clips to fix this structure. This cavity resonator is excited by the two semi-rigid coaxial cables, each of which has a small loop at the top. The transmission-type resonator is constituted and under-coupled equally to the input and output loops with setting  $S_{11} = S_{22}$ . The photograph is shown in Figure 6.

The resonance frequency  $f_0$ , half-power band width  $f_{BW}$ , and the insertion attenuation  $IA_0$  (dB) at  $f_0$  are measured using a network analyzer by means of the swept-frequency method. The value of  $Q_u$  is given by

$$Q_u = \frac{Q_L}{1 - 10^{-IA_0/20}}, \quad Q = \frac{f_0}{f_{BW}} \quad (30)$$

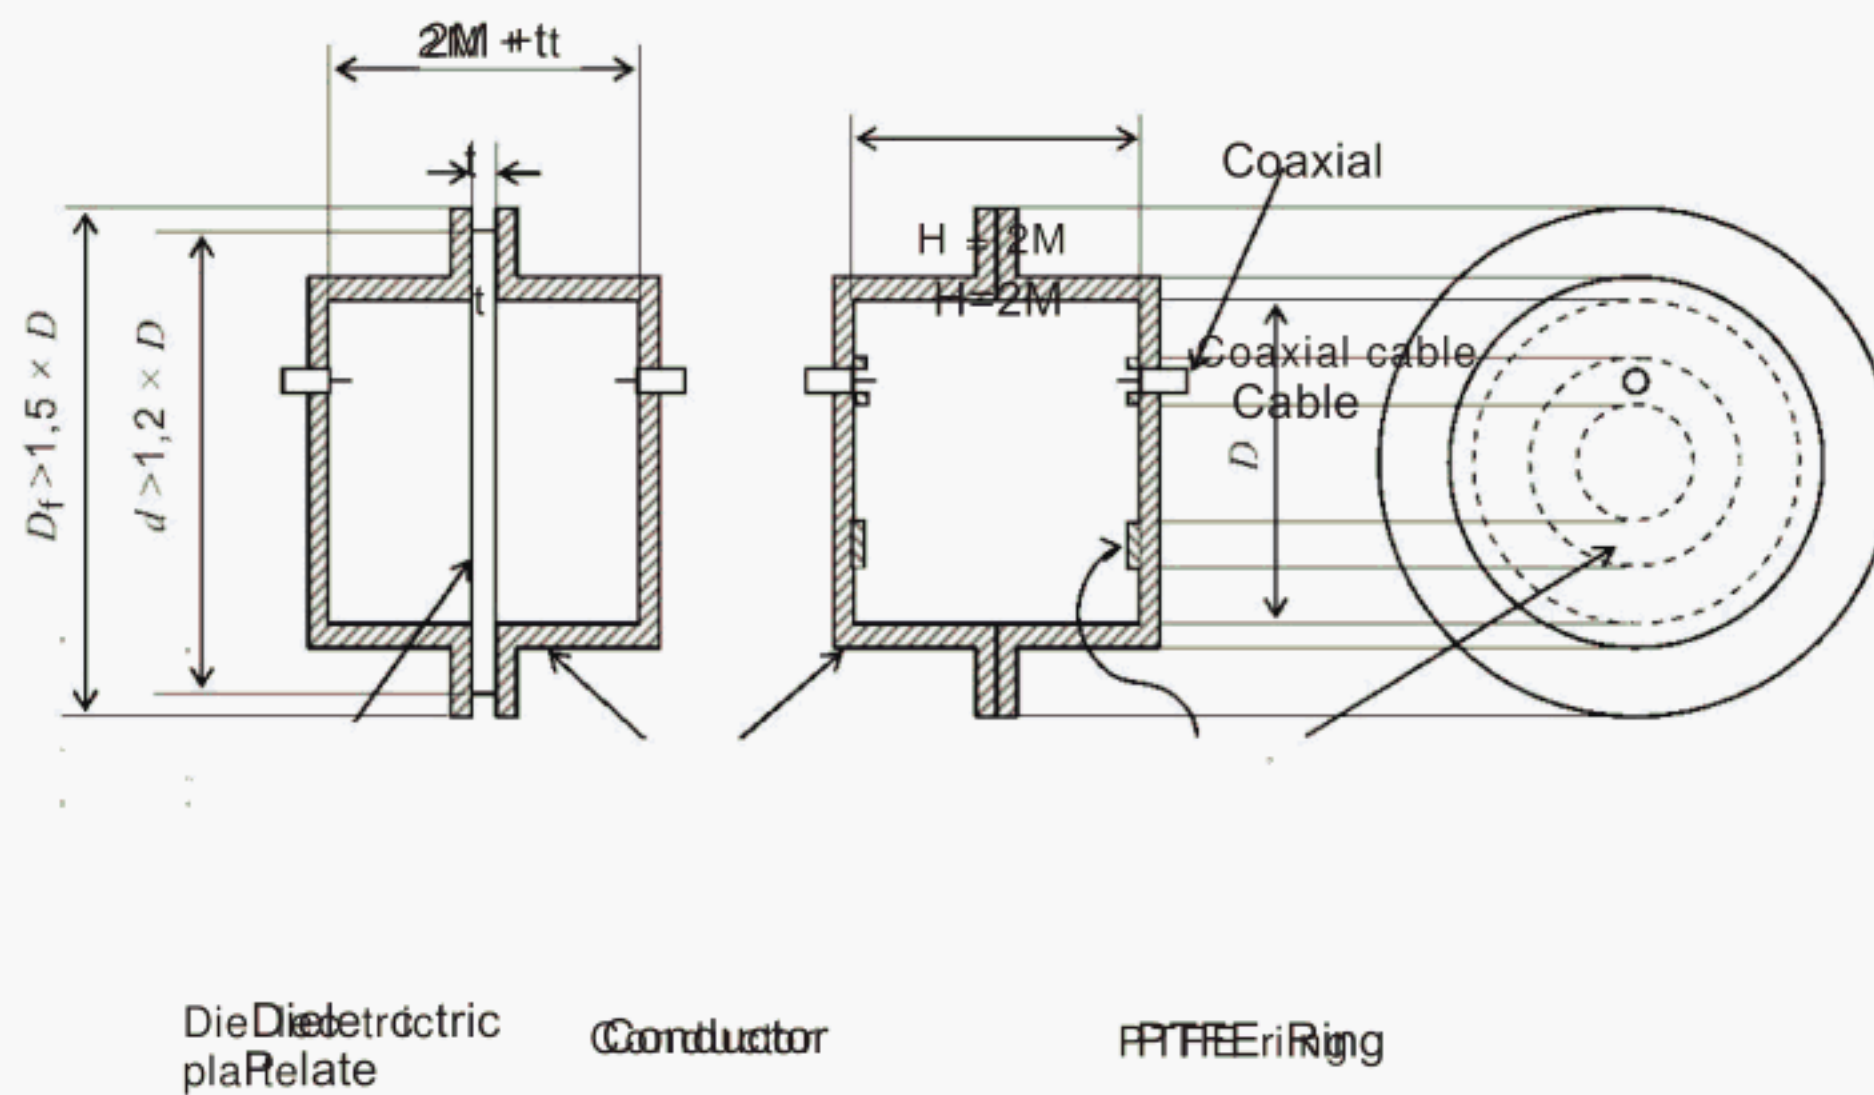

IEC 133/10


IEC 134/10

Figure 5a – Resonator clamping dielectric specimen

Figure 5b – Empty cavity resonator

Figure 5 – Cavity resonator used for measurement

Thermal sensor  
Thermal sensor  
Cavity resonator  
Coaxial cable  
Cold stage

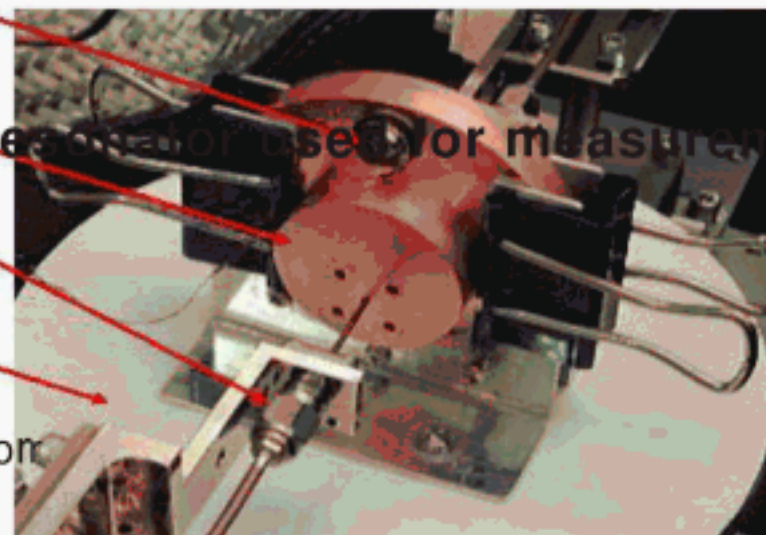

IEC 135/10

Figure 6 – Photograph of cavity resonator for measurement around 10 GHz

## 5 Measurement procedure

### 5.1 Preparation of measurement apparatus


Set up the measurement equipment and apparatus as shown in Figure 4. The cavity resonator and dielectric specimens shall be kept in a clean and dry state, as high humidity degrades unloaded Q. The relative humidity shall preferably be less than 60 %.

### 5.2 Measurement of reference level

The reference level, level of full transmission power, is measured first. Connect the reference line to the measurement equipment and measure the full transmission power level over the entire measurement frequency range.


### 5.3 Measurement of cavity parameters: $D$ , $H$ , $\sigma_r$ , $\alpha_c$ , $TC_p$

Rough values of  $f_1$  of the  $TE_{011}$  resonance mode and  $f_2$  of the  $TE_{012}$  resonance modes can be estimated from the mode chart shown in Figure 7. Resonance peaks of cavity resonator with  $D = 35$  mm and  $H = 25$  mm are shown in Figure 8.

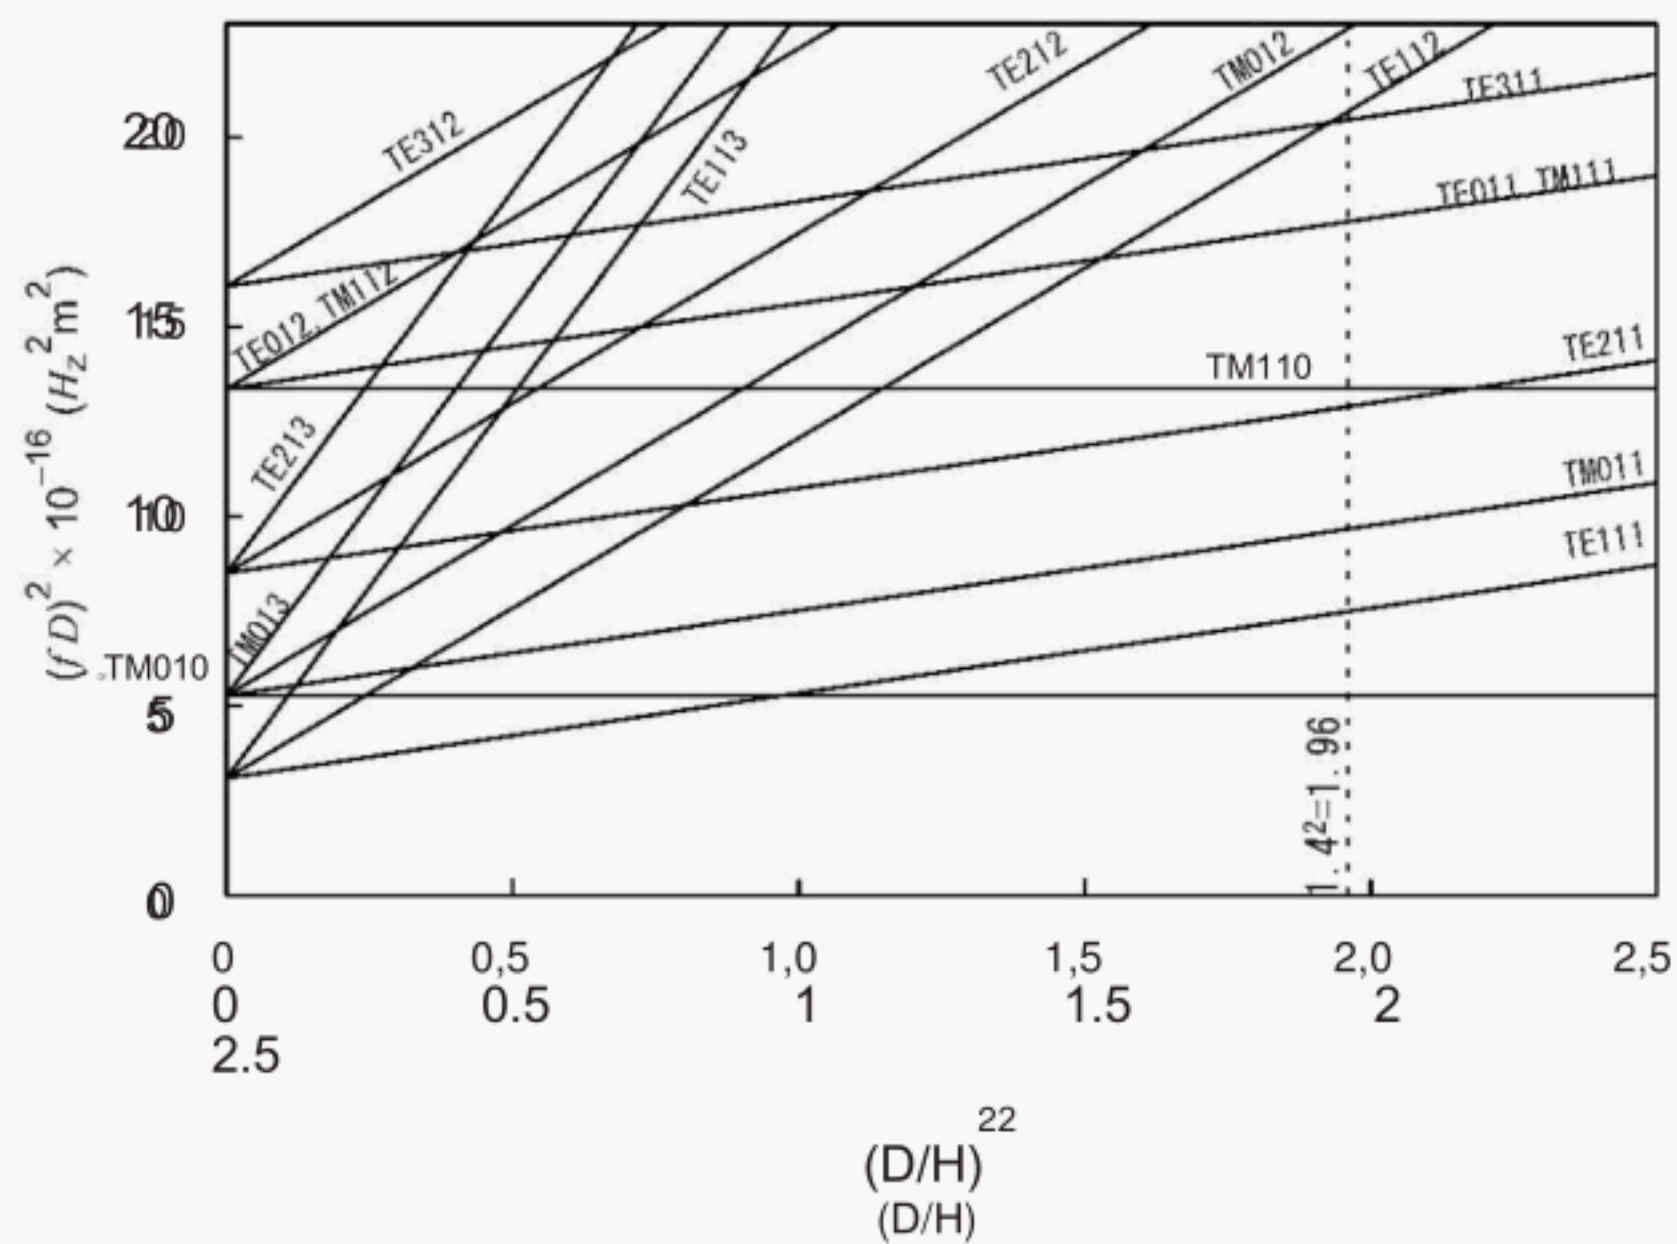

IEC 136/10


Figure 7 – Mode chart of cavity resonator

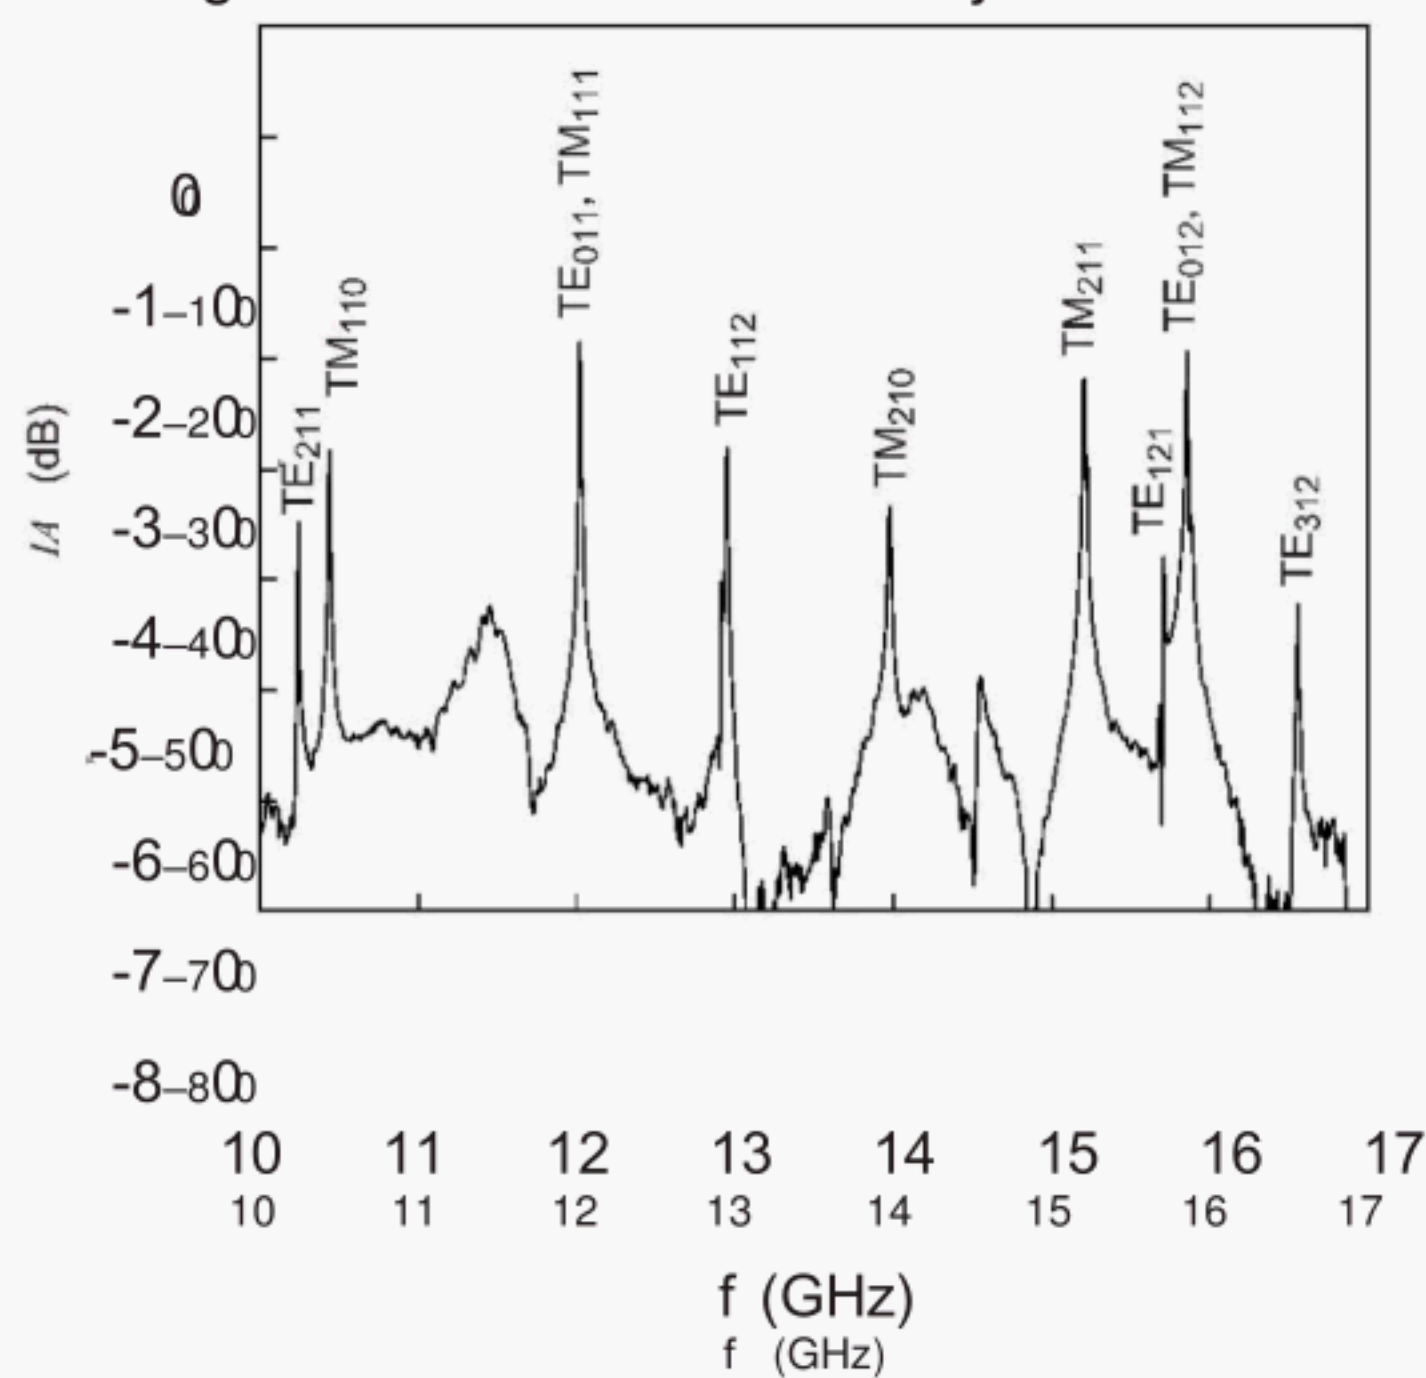

IEC 137/10

Figure 8 – Resonance peaks of cavity resonator

Attach PTFE rings to the end plates of the cavity to separate the degenerate  $TM_{11\ell}$  ( $\ell=1, 2$ ) modes from the  $TE_{01\ell}$  modes, as shown in Figure 5. Set the empty cavity and adjust the insertion attenuation  $IA_0$  to be around 30 dB by changing the distance between two semi-rigid cables, as shown in Figure 9.

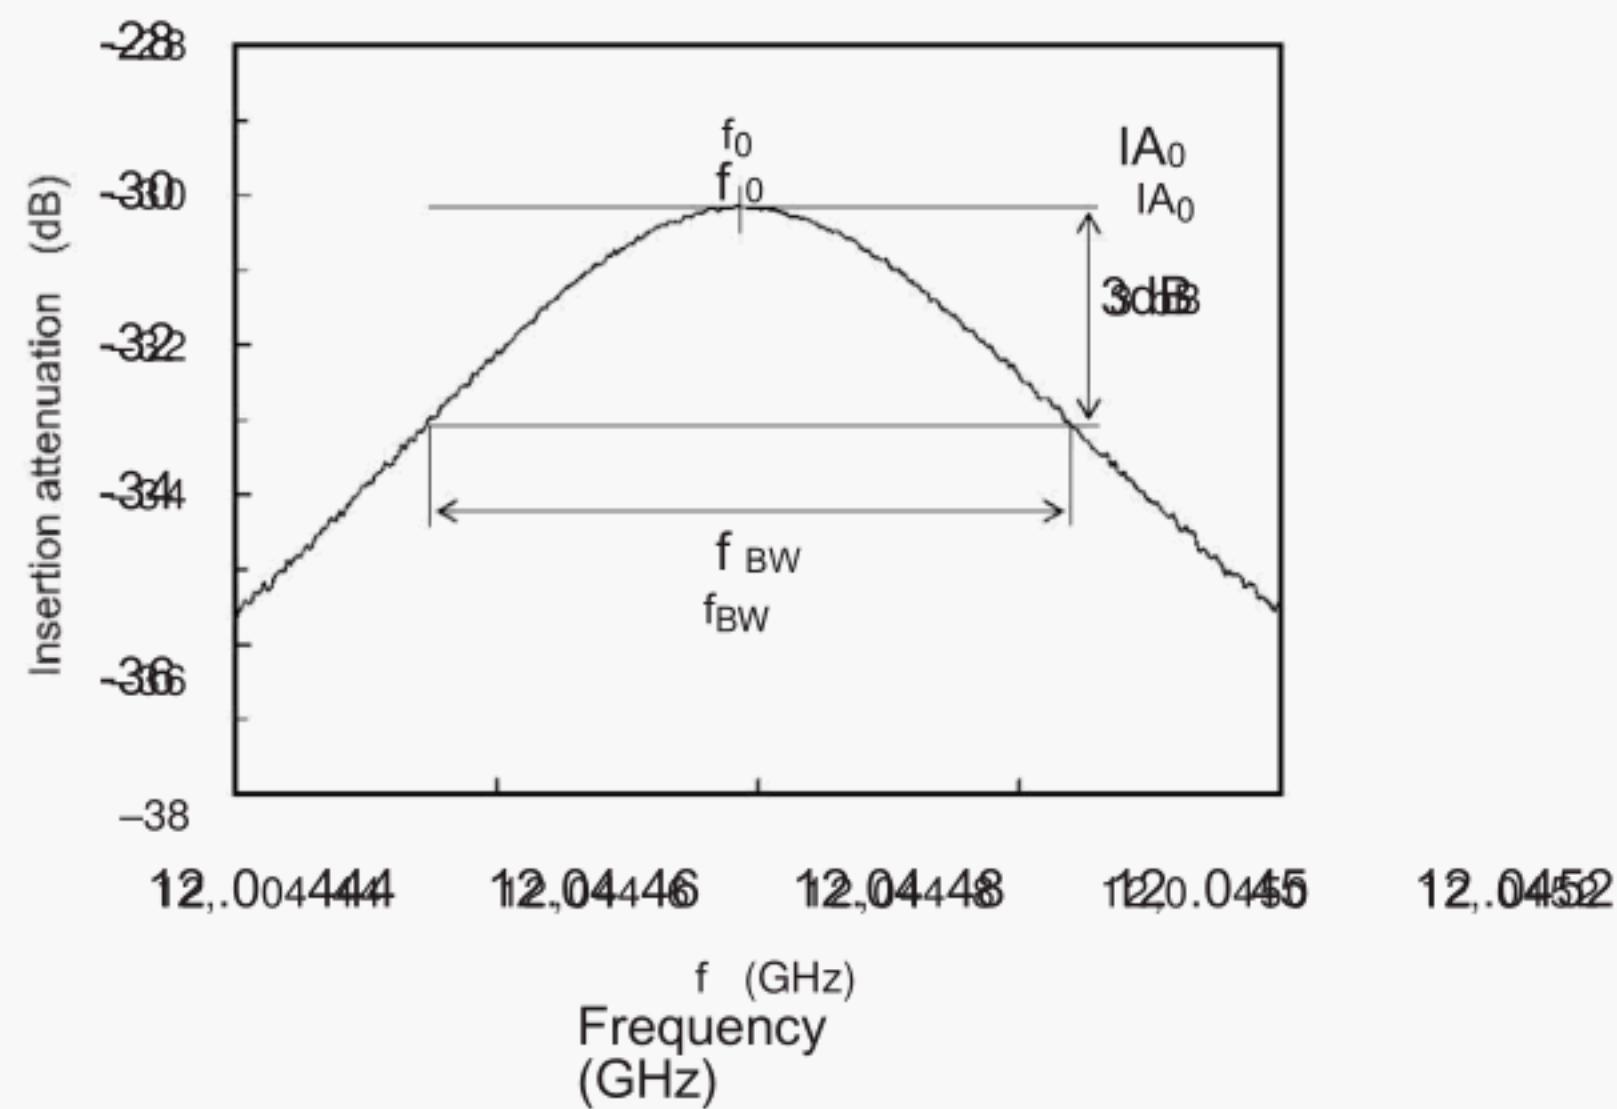


IEC 138/10

**Figure 9 – Resonance frequency  $f_0$ , insertion attenuation  $IA_0$  and half-power band width  $f_{BW}$**

Measure  $f_1$  and  $Q_{uc}$  of the  $TE_{011}$  resonance mode and measure  $f_2$  of the  $TE_{012}$  resonance modes. Calculate  $Q_{u1}$  by using equation (30). Calculate the dimensions  $D$ ,  $H$ , and  $\sigma_r$  of cavity resonator from equations (25), (26) and (28). Since the value of  $\sigma_r$  degrades due to oxidation of the metal surface, it shall be measured periodically. Next, measure temperature dependence of  $f_1$  and  $Q_{uc}$  using the cavity placed in a temperature-stabilized oven. Calculate  $\alpha_c$  and  $TCp$  from equations (27) and (29).

#### 5.4 Measurement of complex permittivity of test specimen: $\epsilon'$ , $\tan\delta$

Place the test specimen between two cylinders and clamp them by clips, as shown in Figure 6. Estimate a rough value of  $f_0$  of the  $TE_{011}$  resonance mode from Figure 10. Then, measure  $f_0$  and  $Q_u$  values. Calculate  $\epsilon'$  and  $\tan\delta$  values using equations (4) to (17).

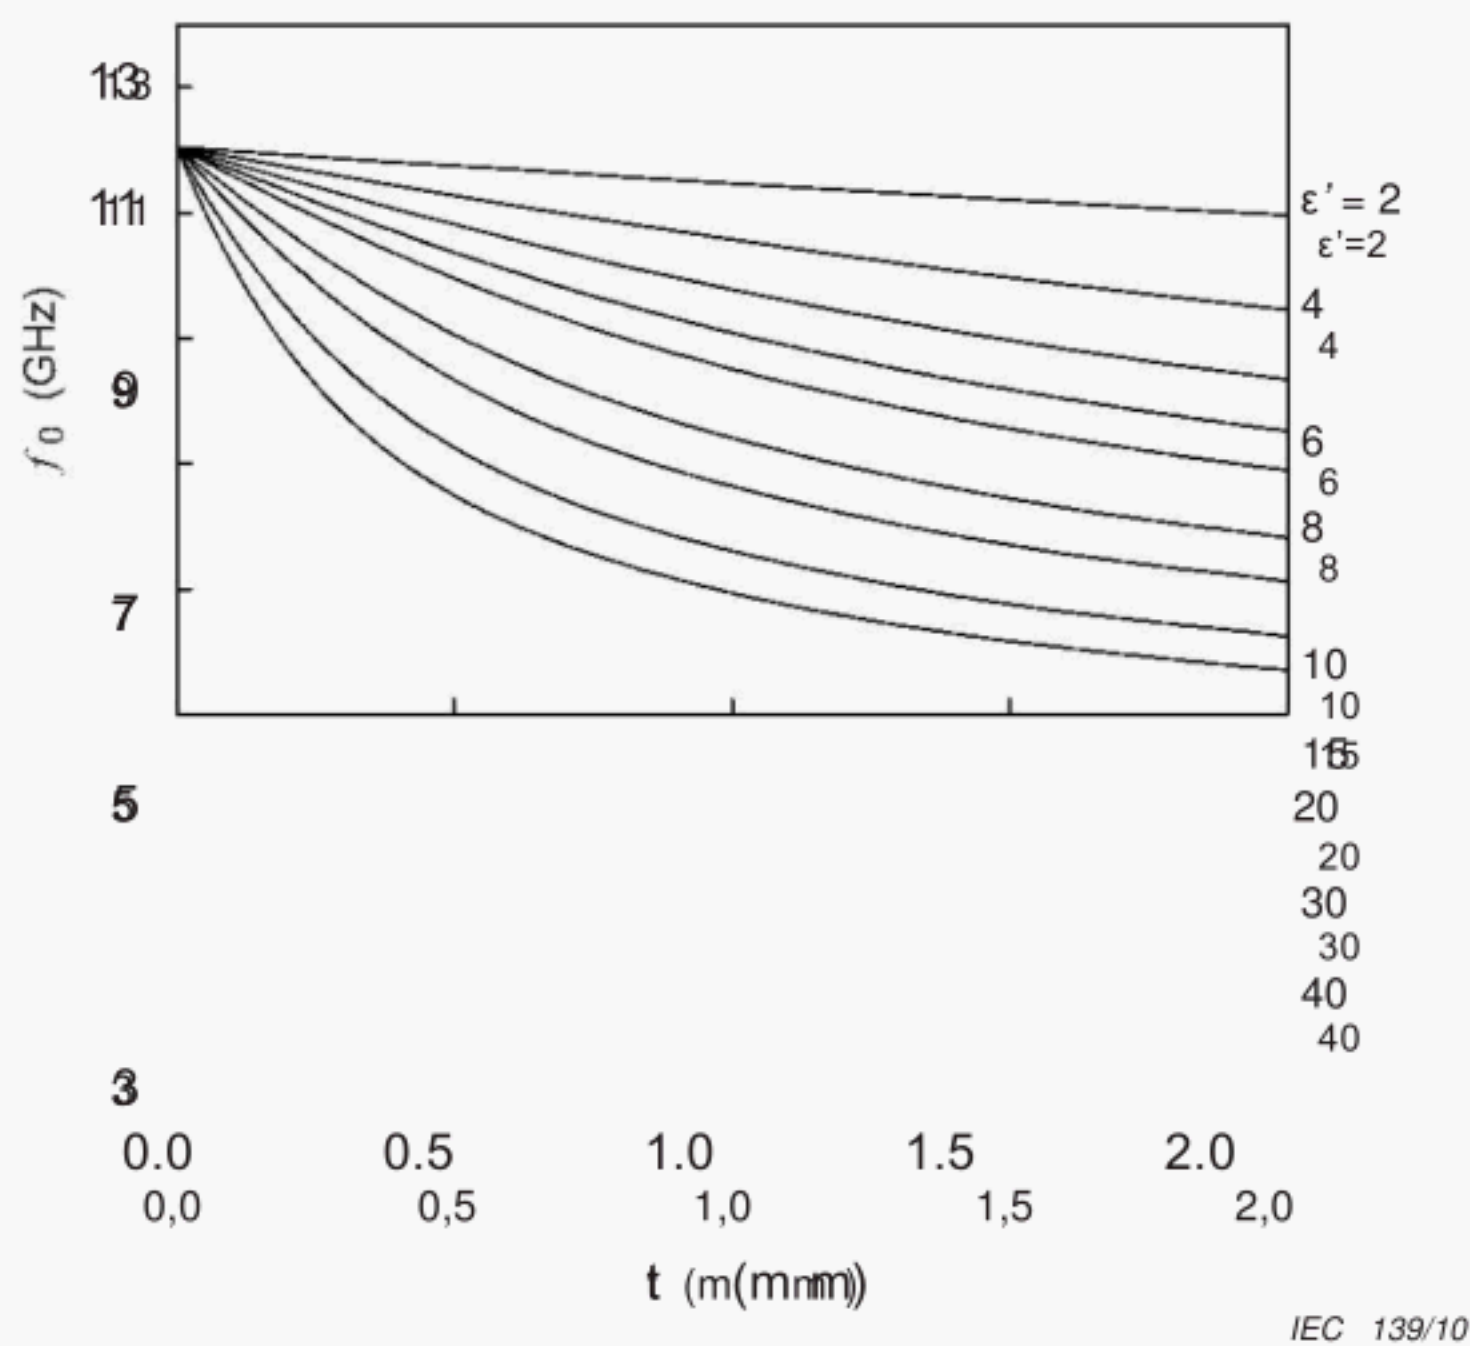

**Figure 10 – Resonance frequency  $f_0$  of  $TE_{011}$  mode of cavity resonator with dielectric plate ( $D = 35$  mm,  $H = 25$  mm)**

### 5.5 Temperature dependence of $\epsilon'$ and $\tan\delta$

Place a cavity resonator clamping the dielectric plate in a temperature-stabilized oven, and measure  $f_0$  and  $Q_u$  as a function of temperature  $T$ . Calculate  $\epsilon'$  and  $\tan\delta$  values as a function  $T$ , taking account of  $\alpha$ ,  $\alpha_c$ , and  $TC_p$ . Then, calculate  $TC\epsilon$  by using equation (3) or by the least squares method for many measurement points against  $T$ .

## Annex A (informative)

### Example of measured result and accuracy

#### A.1 Cavity parameters


Table A.1 shows measured results of cavity parameters. As shown in this table, D and H can be determined accurately to  $\mu\text{m}$  order using  $f_1$  and  $f_2$ . The value of  $\sigma_r$  depends on the surface roughness and the oxidation of the internal wall of the cavity and is desired to be higher than 80 % to keep high accuracy in the  $\tan\delta$  measurement.

**Table A.1 – Measured results of cavity parameters**

$f_1$ (GHz) for TE <sub>011</sub>	$f_2$ (GHz) for TE <sub>012</sub>	$Q_u$ for TE <sub>011</sub>	D mm	H mm	$\alpha_c$ ppm/K	$\sigma_r$ %	TCp 1/K
12,045 6	15,936	24 256	35,053	24,884	15,5	84,4	0,003 4
$\pm 0,000\ 2$	$\pm 0,001$	$\pm 145$	$\pm 0,001$	$\pm 0,002$	$\pm 0,3$	$\pm 1,0$	$\pm 0,000\ 3$

Measured results of temperature dependence of  $f_1$  and  $Q_{uc}$  for an empty cavity resonator are shown in Figure A.1. The value of  $\alpha_c$  in Table A.1 was determined from the temperature dependence of  $f_1$  using equation (27). Furthermore, TCp was determined from the temperature dependence of  $Q_{uc}$  using equation (29). In these calculations,  $\Delta f_1/\Delta T$  and  $\Delta p_r/\Delta T$  were determined by the least squares method. The values of  $\alpha_c$  are nearly equal with nominal value of 16,5 ppm/K<sup>1)</sup> of copper. The values of TCp are around the nominal value TCp = 0,003 9 (1/K) of copper at DC.


1) ppm = parts per million

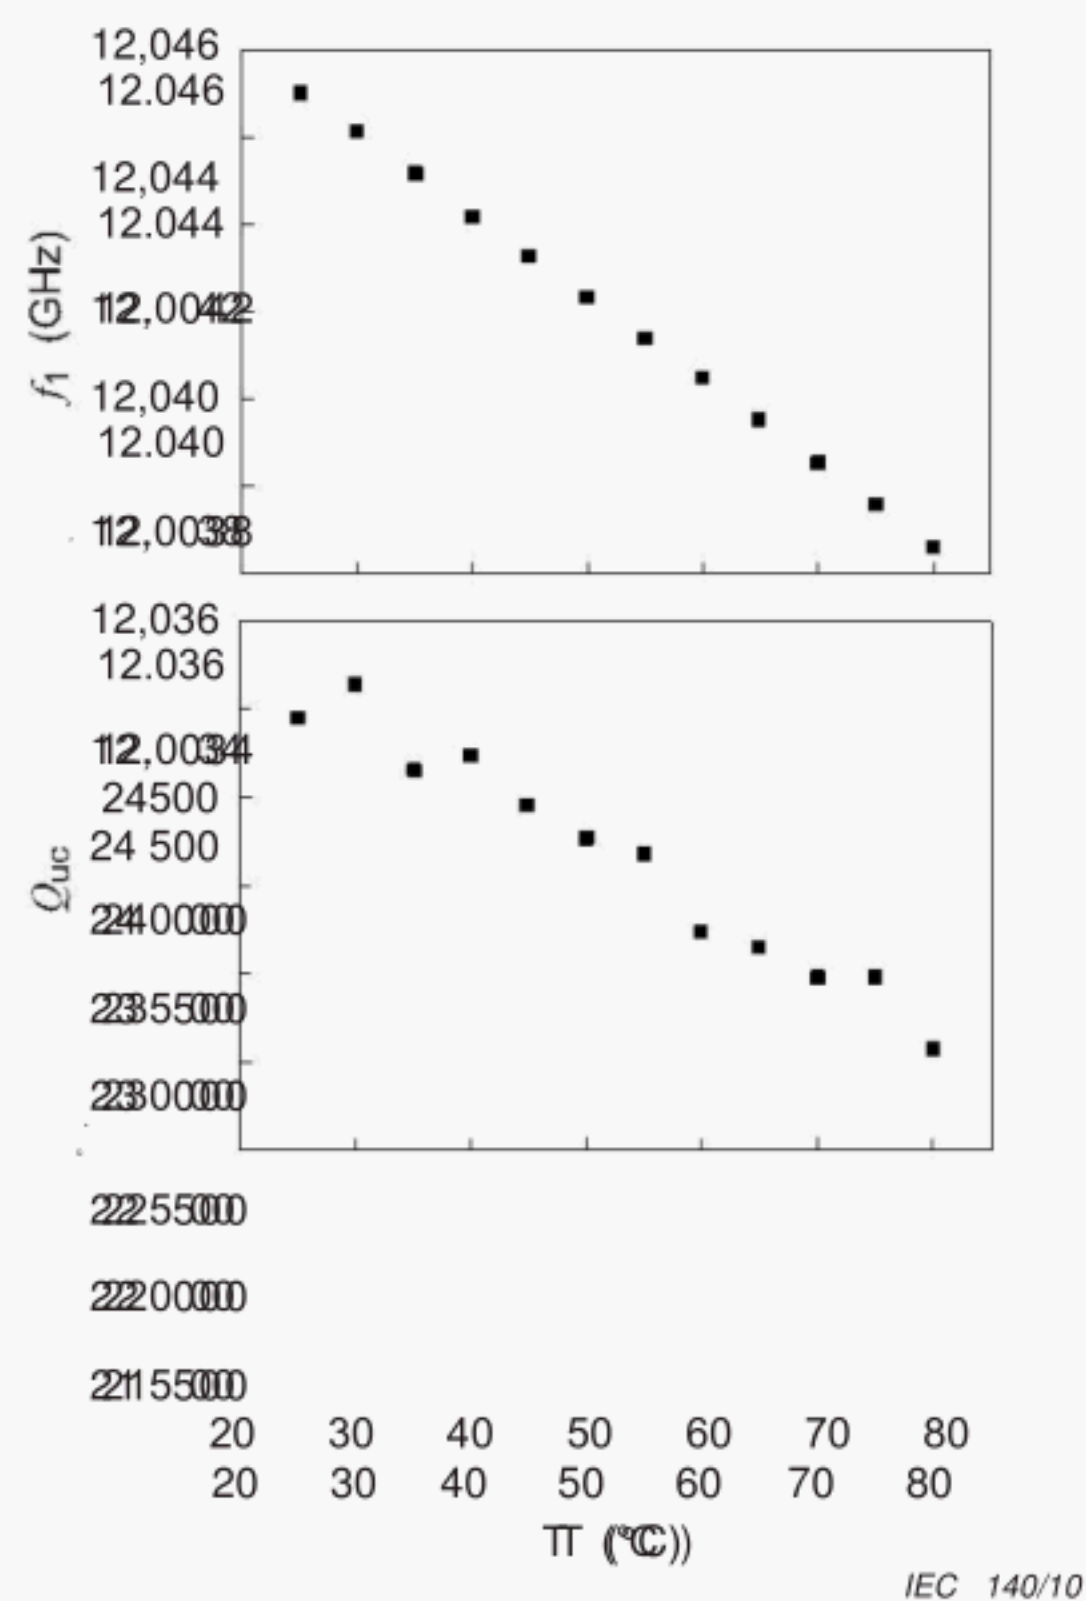

**Figure A.1 – Measured temperature dependence of  $f_1$  and  $Q_{uc}$**

## **A.2 Relative permittivity $\epsilon'$ and $\tan\delta$**

Figure A.2 shows measured resonance peaks of cavity resonator clamping sapphire plate and Table A.2 shows measured values of  $\epsilon'$  and  $\tan\delta$  for the sapphire plate with  $t = 0,958 \pm 0,002$  mm at room temperature. The values of  $\epsilon'$  are the perpendicular component of relative permittivity against c-axis. Measurement errors  $\Delta\epsilon'$  and  $\Delta\tan\delta$  were calculated by using equations (18) and (19). A main cause of  $\Delta\epsilon'$  is uncertainty of the sample thickness.

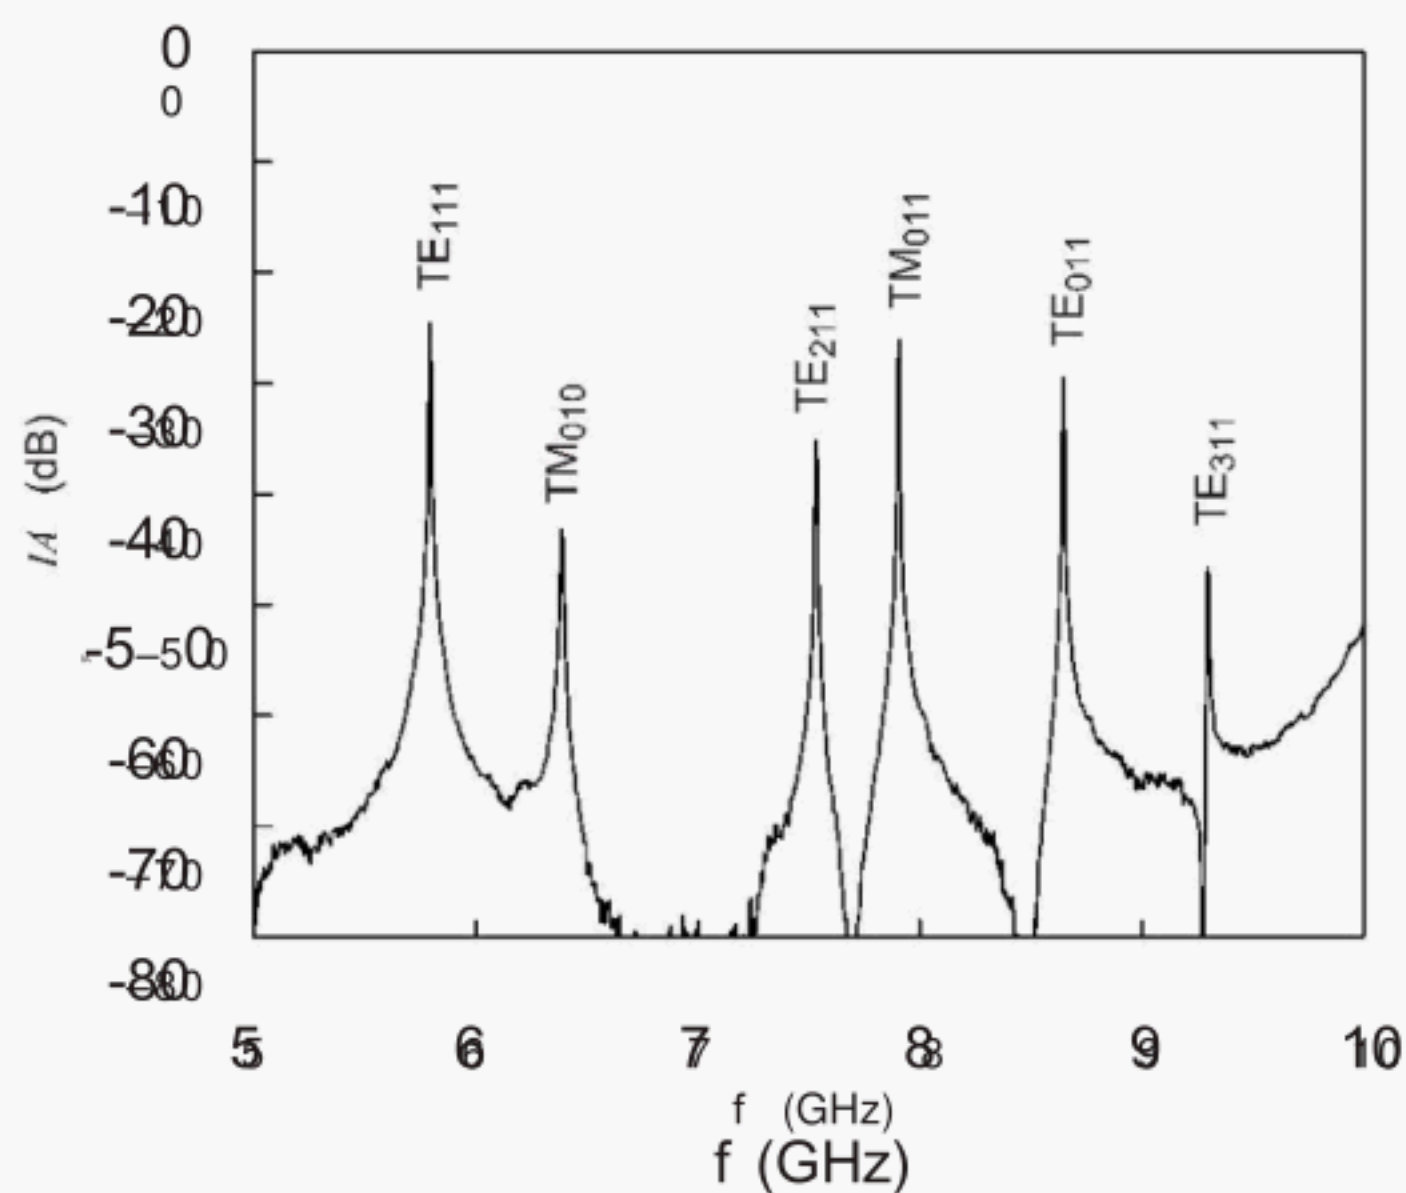


IEC 141/10

Figure A.2 – Resonance peaks of cavity resonator clamping sapphire plate

Table A.2 – Measured results of  $\epsilon'$  and  $\tan\delta$  for sapphire plate

$f_0$ (GHz)	$Q_U$	$\epsilon'$	$\tan\delta$ ( $10^{-5}$ )	$\sigma_r$ (%)
8,754 6	24 043	9,404	0,91	84,4
$\pm 0,000\ 1$	$\pm 165$	$\pm 0,017$	$\pm 0,06$	$\pm 1,0$

Figure A.3 shows measured results of temperature dependence of  $f_0$ ,  $Q_U$ ,  $\epsilon'$  and  $\tan\delta$  for the sapphire plate. The value of  $\epsilon'$  decreases linearly and  $\tan\delta$  increases approximately linearly, with increasing T. Value of  $TC\epsilon$  was determined to be 92 ppm/K using by the least squares method from  $\epsilon'$  values against T.

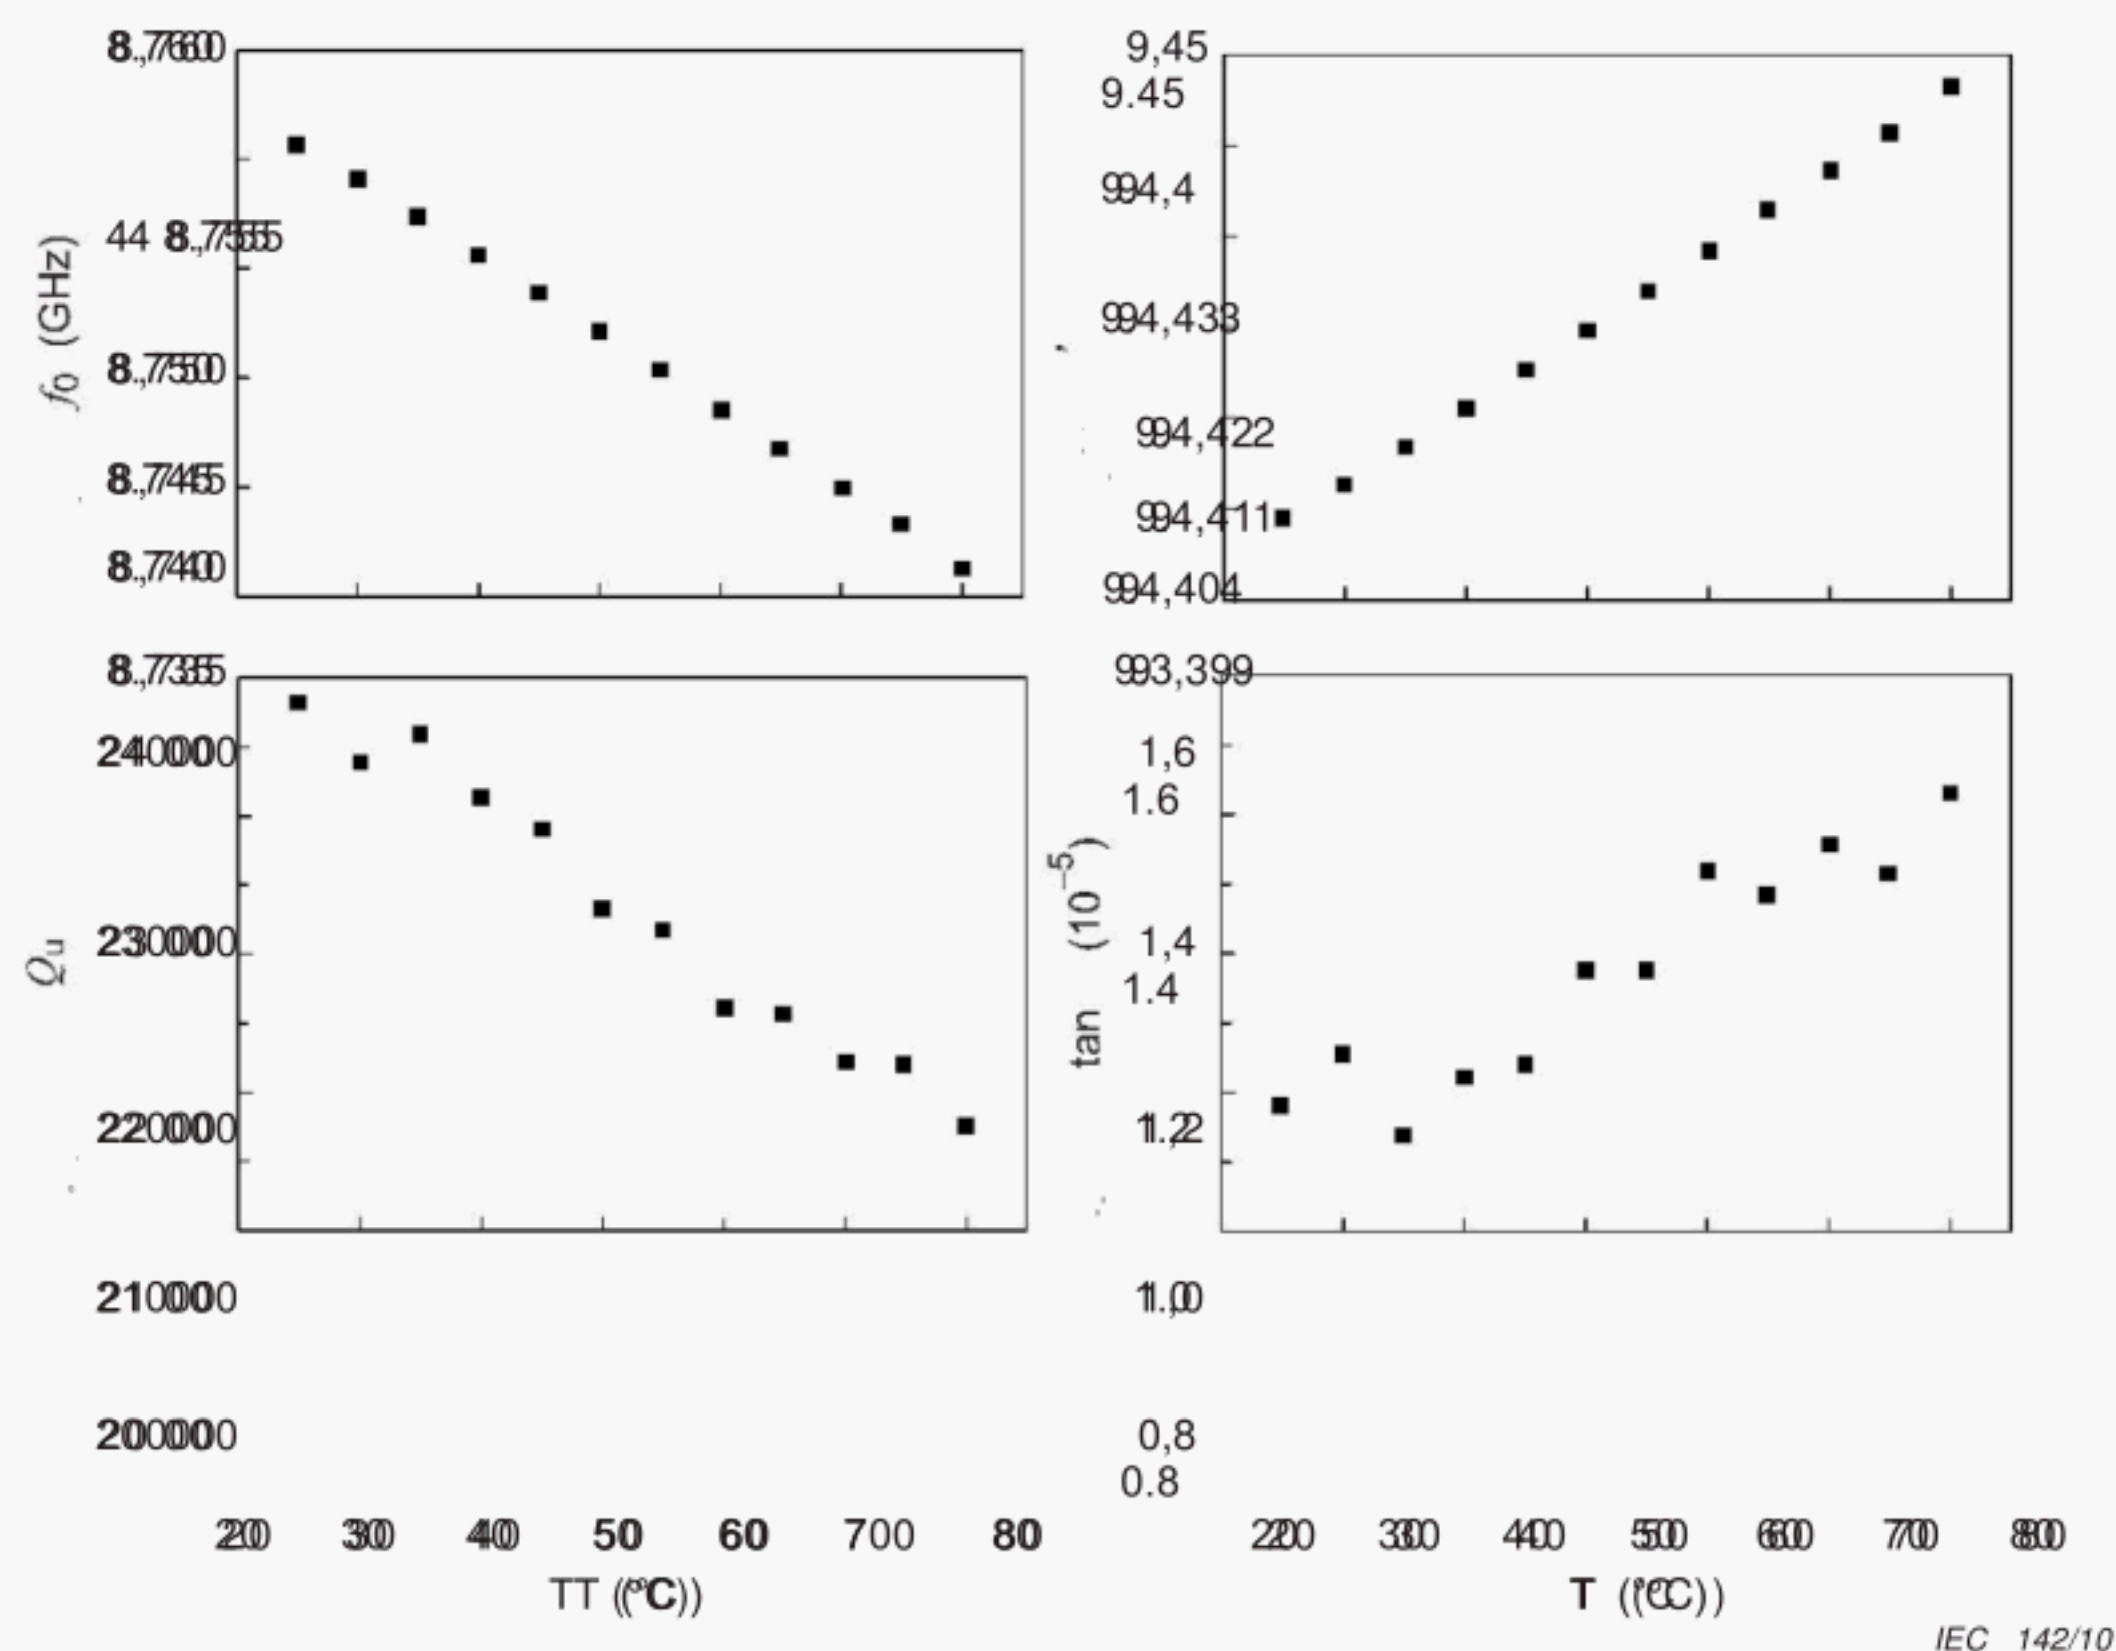

**Figure A.3 – Measured results of temperature dependence of  $f_0$ ,  $Q_u$ ,  $\epsilon'$  and  $\tan \delta$  for sapphire plate**

### A.3 Measurement accuracy

By a round robin test [3]2) for the cavity resonance method, the accuracy of this method was estimated to be within 0,3 % for  $\epsilon'$ , within 4 % for  $\tan \delta$  of  $10^{-4}$  and 20 % for that of  $10^{-6}$ . The measurement resolution of  $TC\epsilon$  is estimated to be 1 ppm/K for  $TC\epsilon$  of  $-10$  ppm/K, and to be 3 ppm/K for  $TC\epsilon$  of 90 ppm/K. This high measurement accuracy and resolution are acceptable for most practical applications for microwave planar circuits.

2) Figures in square brackets refer to the Bibliography.

## Bibliography

- [1] KOBAYASHI Y. and SATO J., "Complex permittivity measurement of dielectric plates by a cavity resonance method", IEICE Technical Report, MW88-40, pp.43-50, Nov. 1988.
  - [2] KOBAYASHI Y. and SATO J., "Improved cavity resonance method for nondestructive measurement of complex permittivity of dielectric plate.", 1988 Conf. of Precision Electromagnetic Measurements, Digest, pp. 147-148, June 1988.
  - [3] KOBAYASHI Y. and NAKAYAMA A., "Round Robin Test on a Cavity Resonance Method to Measure Complex Permittivity of Dielectric Plates at Microwave Frequency" IEEE Trans. Dielectrics and Electrical Insulation, vol 13. pp. 751-759, August 2006.
  - [4] KENT G., "An evanescent-mode tester for ceramic dielectric substrates," IEEE Trans. Microwave Theory Tech., vol 36, pp. 1451-1454, Oct. 1988.
  - [5] KENT G., "Nondestructive permittivity measurement of substrates," IEEE Trans. Instrum. Meas., vol. 45, pp. 102-106, Feb. 1996.
  - [6] KENT G. and BELL S., "The gap correction for the resonant-mode dielectrometer," IEEE Trans. Instrum. Meas., vol. 45, pp. 98-101, Feb. 1996.
  - [7] SHIMIZU T. and KOBAYASHI Y., "Cut-off circular waveguide method for dielectric substrate measurement in millimeter wave range", IEICE Trans., Electron., vol. E87-C, no.5, May 2004.
-





# British Standards Institution (BSI)

BSI is the independent national body responsible for preparing British Standards and other standards-related publications, information and services.

It presents the UK view on standards in Europe and at the international level.

It is incorporated by Royal Charter.

## Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

BSI offers Members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Tel: +44 (0)20 8996 7669 Fax: +44 (0)20 8996 7001  
Email: [plus@bsigroup.com](mailto:plus@bsigroup.com)

## Buying standards

You may buy PDF and hard copy versions of standards directly using a credit card from the BSI Shop on the website [www.bsigroup.com/shop](http://www.bsigroup.com/shop). In addition all orders for BSI, international and foreign standards publications can be addressed to BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001  
Email: [orders@bsigroup.com](mailto:orders@bsigroup.com)

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

## Information on standards

BSI provides a wide range of information on national, European and international standards through its Knowledge Centre.  
Tel: +44 (0)20 8996 7004 Fax: +44 (0)20 8996 7005  
Email: [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

Various BSI electronic information services are also available which give details on all its products and services.

Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048  
Email: [info@bsigroup.com](mailto:info@bsigroup.com)

BSI Subscribing Members are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001  
Email: [membership@bsigroup.com](mailto:membership@bsigroup.com)

Information regarding online access to British Standards via British Standards Online can be found at [www.bsigroup.com/BSOL](http://www.bsigroup.com/BSOL)

Further information about BSI is available on the BSI website at [www.bsigroup.com/standards](http://www.bsigroup.com/standards)

## Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies.

Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. This does not preclude the free use, in the course of implementing the standard of necessary details such as symbols, and size, type or grade designations. If these details are to be used

for any other purpose than implementation then the prior written permission of BSI must be obtained. Details and advice can be obtained from the Copyright & Licensing Manager.

Tel: +44 (0)20 8996 7070  
Email: [copyright@bsigroup.com](mailto:copyright@bsigroup.com)

### BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Tel +44 (0)20 8996 9001  
Fax +44 (0)20 8996 7001  
[www.bsigroup.com/standards](http://www.bsigroup.com/standards)



raising standards worldwide™